



SOUND ABSORPTION COEFFICIENTS of Architectural Acoustical Materials

ACOUSTICAL MATERIALS ASSOCIATION

BULLETIN X 1948

Supersedes and cancels all previous issues

A.I.A. No. 39-b

Digitized by:



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL

www.apti.org

**BUILDING
TECHNOLOGY
HERITAGE
LIBRARY**

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:

**NATIONAL
BUILDING
ARTS
CENTER**

<http://web.nationalbuildingarts.org>

THE ACOUSTICAL MATERIALS ASSOCIATION

The Acoustical Materials Association is an organization formed by manufacturers of architectural acoustical materials for the purpose of furnishing architects and others with reliable technical data on sound absorbing materials and their uses.

All manufacturers of such materials are invited to apply for membership in the Association.

This bulletin is published periodically so that up-to-date information on products manufactured by Association members is readily available. Interim reports may be made from time to time as new materials are introduced and tested, and will appear on the Association letterhead.

MEMBERS

ARMSTRONG CORK COMPANY
Lancaster, Pennsylvania

THE CELOTEX CORPORATION
120 South La Salle St., Chicago 3, Ill.

THE E. F. HAUSERMAN COMPANY
Cleveland 5, Ohio

JOHNS-MANVILLE SALES CORPORATION
22 East 40th St., New York 16, N. Y.

NATIONAL GYPSUM COMPANY
325 Delaware Ave., Buffalo 2, New York

OWENS-CORNING FIBERGLAS CORP.
Toledo, Ohio

SIMPSON INDUSTRIES
1010 White Bldg., Seattle 1, Wash.

UNITED STATES GYPSUM COMPANY
300 West Adams Street, Chicago 6, Ill.

Information regarding the Association and its activities can be obtained from the members or their local representatives or by addressing Acoustical Materials Association, 205 West Monroe St., Chicago, Ill.

A. M. A. SOUND ABSORPTION COEFFICIENTS

The sound absorption coefficient of a material is a measure of its efficiency as a sound absorbent which will serve as a basis for computations of reverberation times and of noise reduction.

The tables of coefficients presented in the following pages give the results of tests all made under identical conditions in one laboratory. Sound absorption coefficients are customarily reported and published for the six frequencies—each an octave apart—from 128

cycles per second, to 4,096 cycles per second inclusive.

The test data contained herein have all been obtained under identical conditions and are, therefore, comparable. The Association does not wish to discredit other data but, recognizing the confusing differences which have existed in the past, believes that a single set of values approved by all members of the Association is preferable.

APPLICATION OF MATERIALS

Acoustical materials are properly classified as "Building Specialties" and their installation is best placed in the hands of the persons familiar with them. Members of the AMA

will gladly refer architects and builders to representatives in all localities who are skilled in the application of their products.

RATING OF MATERIALS

In order not to emphasize unduly the precise value of the absorption coefficient of a material, it should be borne in mind that experiments may, at certain frequencies, depart from the mean of a large number of measure-

ments by as much as 7% of the mean value. Minor differences in coefficients, therefore, should not be considered a serious matter in the selection of materials, and attention given to the many other properties of the materials.

PERFORMANCE

All test data listed are on currently manufactured material and each member company

is pledged to maintain the efficiency of his products as listed.

Alphabetical List of Trade Names

For convenient reference, the trade names of materials appearing in this bulletin are listed below in alphabetical order together with name of the manufacturer. Tables showing sound absorption coefficients and other physical characteristics of each material will be found on pages indicated.

TRADE NAME	MANUFACTURER	PAGE
ACOUSTEEL*	The Celotex Corporation	7
ACOUSTI-CELOTEX*	The Celotex Corporation	7
ACOUSTIFIBRE*	National Gypsum Company	9
ACOUSTIMETAL*	National Gypsum Company	9
ACOUSTONE*	United States Gypsum Company	10
AIRACOUSTIC*	Johns-Manville Sales Corporation	8
ARRESTONE*	Armstrong Cork Company	6
AUDITONE*	United States Gypsum Company	10
CORKOUSTIC*	Armstrong Cork Company	6
CUSHIONTONE*	Armstrong Cork Company	6
ECONACOUSTIC*	National Gypsum Company	9
FIBERGLAS* ACOUSTICAL TILE	Owens-Corning Fiberglas Corporation	9
FIBRACOUSTIC	Johns-Manville Sales Corporation	8
FIBRETEX	Johns-Manville Sales Corporation	8
FIBRETONE*	Johns-Manville Sales Corporation	8
MINERAL WOOL ACOUSTICAL MATERIAL	Armstrong Cork Company	6
MUFFLETONE*	The Celotex Corporation	7
SANACOUSTIC*	Johns-Manville Sales Corporation	8
SIMPSON ACOUSTICAL TILE	Simpson Industries	10
SOUND ISOLATION BLANKET	Johns-Manville Sales Corporation	8
TRANSITE* ACOUSTICAL PANELS	Johns-Manville Sales Corporation	8
TRAVERTONE	Armstrong Cork Company	6

*T. M. REG. U. S. PAT. OFF.

LIGHT REFLECTION VALUES

All light reflection values on acoustical materials listed in the following tables are obtained from tests conducted at a laboratory chosen by the Association. The tests are made on samples selected by a representative of the testing laboratory as typical of the actual material submitted for sound absorption tests. The light reflection is measured in a type of reflectometer known as the "Baumgartner sphere" described in the "Transactions of the Illuminating Engineering Society," 33, 379 (1938). Each value reported is the average of measurements on four (4) samples.

The letter appearing in the tables under the column heading "Color" indicates the color of the sample which gave the light reflection value in the adjoining column, in accordance with the following table:

W—White

I—Ivory

Wp—White, perforated. This symbol used only when surface is combination of perforated and unperforated units.

Wu—White, unperforated. This symbol used only when surface is combination of perforated and unperforated units.

THICKNESSES

Unless otherwise noted, the thickness given is the thickness of the sound-absorbing element forming the face of the construction.

The thickness of other sound-absorbing elements in the construction, if used, is indicated by the type of mounting.


NOISE REDUCTION COEFFICIENTS

The noise reduction coefficient is the average of the coefficients at frequencies from 256 to 2048 cycles inclusive, given to the nearest 5%. This average coefficient is recommended for use in comparing materials to be applied in offices, hospitals, banks, corridors, etc.


For auditorium treatment, attention should be directed to the coefficients at 512 cycles and other frequencies as explained in "Theory and Use" bulletin published by the Association.

TYPES OF MOUNTING


(Used in Conducting Sound Absorption Tests)

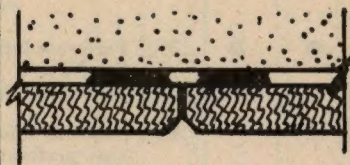


1. Cemented to plaster board. Considered equivalent to cementing to plaster or concrete ceiling.




2. Nailed to 1" x 2" wood furring 12" o.c. unless otherwise indicated.

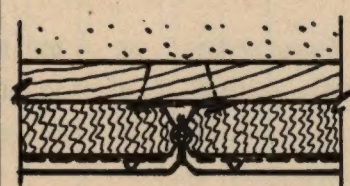


3. Attached to metal supports applied to 1" x 2" wood furring.

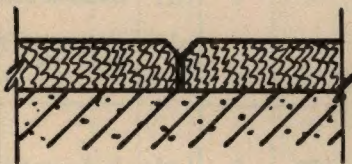


4. Laid directly on laboratory floor.




5. Nailed to 1" x 3" wood furring 24" o.c. and filled in between furring with 1" mineral wool.

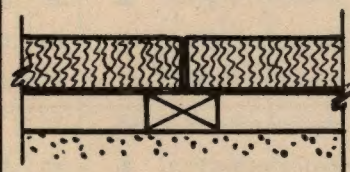


6. Laid on 24 ga. sheet iron, nailed to 1" x 2" wood furring 24" o.c.

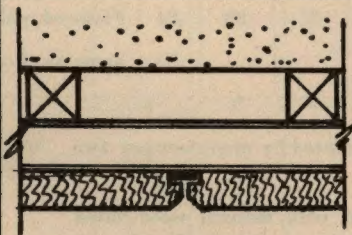

7. Attached to special metal supports mounted on 2" x 2" wood furring.



8. Nailed to 2" x 2" wood furring 24" o.c. 2" mineral wool between furring.

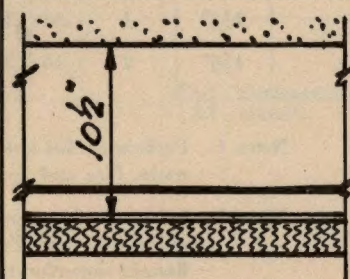

9. Mechanically mounted to metal furring strips 24" o.c. 10 1/2" from boundary surface of Sound Chamber.

ARMSTRONG CORK COMPANY

MATERIAL	Thick- ness (See Page 4)	Mount- ing (See Page 5)	COEFFICIENTS						Noise Red. Coef. (See Page 4)	Unit Size Tested	Light Reflection		Wt. Lbs. per Sq. Ft.	SURFACE	Test No.
			128	256	512	1024	2048	4096			Color	Value			
CUSHIONTONE															
A	1/2"	1	.05	.18	.56	.76	.77	.73	.55	12"x12"	W	.78	.79	Perforated, painted See Note 1	46-109
A	1/2"	2	.07	.47	.55	.70	.77	.74	.60	12"x12"			.79	Same as above	46-108
A	5/8"	1	.09	.25	.60	.80	.78	.73	.60	12"x12"			.92	Same as above ex- cept perforations 1/2" deep	46-116
A	5/8"	2	.13	.45	.55	.73	.79	.75	.65	12"x12"			.92	Same as above	46-115
A	3/4"	1	.10	.28	.66	.91	.82	.69	.65	12"x12"			1.05	Same as above ex- cept perforations 5/8" deep	47-28
A	3/4"	2	.14	.51	.59	.87	.81	.70	.70	12"x12"			1.05	Same as above	47-27
A	7/8"	1	.09	.28	.74	.98	.78	.70	.70	12"x12"			1.17	Same as above ex- cept perforations 3/4" deep	46-118
A	7/8"	2	.17	.51	.73	.95	.75	.72	.75	12"x12"			1.17	Same as above	46-117
F	3/4"	1	.05	.14	.55	.90	.78	.78	.60	12"x12"			1.13	Perforated, painted See Note 3	46-114
ARRESTONE Absorbing Pads Plus metal facing Plus furring	1 1/4" 1 5/8" 2 1/2"	3	.25	.56	.99	.99	.77	.60	.85	12"x24"	W		1.20	Perforated, enameled metal. See Note 2	46-10
TRAVERTONE	3/4"	1	.12	.27	.72	.79	.76	.77	.65	12"x12"	W		1.13	Fissured, painted	46-110
CORKOUSTIC															
	1 1/2"	1	.04	.13	.44	.76	.43	.55	.45	12"x12"	W	.80	.84	Fissured, painted	A47-95
	1 1/2"	2	.14	.25	.61	.43	.52	.54	.45	12"x12"			.84	Same as above	A47-94

NOTE 1. Perforated 484 holes per sq. ft., 3/16" diameter, 1/16" deep. Painted by manufacturer two coats, face and bevels.

NOTE 2. Arrestone is a perforated enameled metal pan, backed with mineral wool sound absorbing pad. Perforations are .093" diameter, 1105 holes per sq. ft. Bevels and flanges unperforated.

NOTE 3. Perforated 484 holes per sq. ft., 3/16" diameter, 5/8" deep.

THE CELOTEX CORPORATION

MATERIAL	Thick- ness (See Page 4)	Mount- ing (See Page 5)	COEFFICIENTS						Noise Red. Coef. (See Page 4)	Unit Size Tested	Light Reflection		Wt. Lbs. per Sq. Ft.	SURFACE	Test No.
			128	256	512	1024	2048	4096			Color	Value			
ACOUSTI-CELOTEX															
Type CS-1	½"	1	.09	.15	.61	.77	.70	.64	.55	12"x12"	I	.78	.66	Perforated ¹ , painted ²	46-58
Type CS-1	½"	2	.14	.46	.52	.71	.72	.64	.60	12"x12"			.66	Perforated ¹ , painted ²	46-57
Type C-2	⅝"	1	.09	.26	.69	.86	.67	.62	.60	12"x12"	I	.78	.83	Perforated ¹ , painted ²	A47-76
Type C-2	⅝"	2	.12	.51	.65	.73	.66	.58	.65	12"x12"			.83	Perforated ¹ , painted ²	A47-75
Type C-4	1¼"	1	.14	.42	.99	.74	.60	.50	.70	12"x12"	I	.78	1.34	Perforated ¹ , painted ²	47-4
Type C-4	1¼"	2	.25	.58	.99	.75	.58	.50	.75	12"x12"			1.34	Perforated ¹ , painted ²	47-3
Type C-4	1¼"	7	.53	.58	.93	.70	.55	.48	.70	12"x24"	W	.81	1.58	Perforated ¹ , painted ³	46-65
Type C-6	1¼"	1	.15	.34	.99	.94	.61	.61	.70	12"x12"	W	.76	1.51	Perforated ⁴ , painted ³	46-64
Type C-6	1¼"	2	.27	.57	.91	.91	.67	.58	.75	12"x12"			1.51	Perforated ⁴ , painted ³	46-63
Type C-7	1"	7	.41	.48	.68	.79	.75	.55	.70	12"x24"	I	.78	1.40	Perforated ¹ , painted ²	46-66
Type C-8	1"	2	.25	.49	.69	.78	.61	.48	.65	24"x24"	W	.81	1.54	Perforated ¹ , painted ³	46-39
Type C-9	¾"	1	.11	.23	.80	.93	.58	.50	.65	12"x12"	I	.78	.96	Perforated ¹ , painted ²	46-132
Type C-9	¾"	2	.12	.45	.79	.89	.61	.60	.70	12"x12"			.96	Perforated ¹ , painted ²	46-131
Type M-1	⅝"	1	.07	.21	.64	.86	.93	.83	.65	12"x12"	W	.80	1.31	Perforated ⁵ , painted ³	46-12
Type M-1	⅝"	2	.12	.48	.50	.79	.93	.82	.70	12"x12"			1.31	Perforated ⁵ , painted ³	46-11
Type M-2	1"	1	.08	.27	.92	.95	.80	.71	.75	12"x12"	W	.80	1.81	Perforated ⁵ , painted ³	46-44
Type M-2	1"	7	.40	.44	.79	.99	.77	.71	.75	12"x24"	W	.80	2.23	Perforated ⁶ , painted ³	46-130
MUFFLESTONE															
Standard	1"	1	.12	.30	.74	.76	.71	.67	.65	12"x12"			1.80	Integrally colored	46-24
Fissured	1"	1	.09	.29	.83	.97	.77	.71	.70	12"x12"			1.92	Integrally colored	46-67
ACOUSTEEL															
Pad	1¼"	3	.25	.52	.99	.99	.81	.60	.85	12"x24"			{Pad 1.08	Perforated, enameled metal ⁶ .	46-13
Plus Spacers and metal facing }	1⅝"														
Plus furring	2½"														

NOTE 1. Perforated 441 holes per sq. ft., 3/16" in diameter, 1 7/32" o.c.

NOTE 2. Face painted before perforating.

NOTE 3. Painted after perforating.

NOTE 4. Perforated 441 holes per sq. ft., 1/4" in diameter, 1 7/32" o.c.

NOTE 5. Perforated 676 holes per sq. ft., 5/32" in diameter, 7/16" o.c.

NOTE 6. Acousteel is a perforated, enamelled metal pan backed with mineral wool sound absorbing pad. Perforations are .093" diameter, 1105 holes per sq. ft. Bevels and flanges unperforated.

JOHNS-MANVILLE CORPORATION

MATERIAL	Thick- ness (See Page 4)	Mount- ing (See Page 5)	COEFFICIENTS						Noise Red. Coef. (See Page 4)	Unit Size Tested	Light Reflection		Wt. Lbs. per Sq. Ft.	SURFACE	Test No.
			128	256	512	1024	2048	4096			Color	Value			
SANACOUSTIC Type KK, pad Plus metal facing and pad supports Plus furring	1 1/4" 1 3/8" 2 1/2"	3	.25	.58	.96	.97	.85	.72	.85	12"x24"	W	.76	Pad 1.28	Perforated, enameled metal. See Note 1	46-88
TRANSITE ACOUSTICAL PANELS Rock Wool Blanket Plus perforated Transite	1" 1 3/8"	5	.17	.49	.94	.90	.70	.43	.75	—	—	—	1.20	Perforated, unpaint- ed. See Note 2	46-77
Rock Wool Blanket Plus perforated Transite	2" 2 3/8"	8	.29	.57	.94	.93	.70	.48	.80	—	—	—	2.00	Same as above	46-43
TRANSITE ACOUSTICAL UNIT, pad	1" 1 1/8"	2	.32	.58	.72	.85	.76	.67	.75	12"x12"	W	—	2.60	Perforated, painted See Note 3	47-45
FIBRACOUSTIC	1" 1"	1 2	.18 .25	.42 .62	.81 .72	.75 .72	.71 .71	.72 .76	.65 .70	12"x12" 12"x12"	W W	.58 .58	.54 .54	Painted Painted	46-105 46-104
SOUND ISOLATION Blanket MK Blanket MK	1" 2"	4 4	.22 .39	.46 .57	.86 .91	.98 .91	.88 .80	.77 .78	.80 .80	— —	— —	— —	1.20 2.00	Covered with mus- lin, unpainted	46-73 46-42
FIBREONE	1/2" 3/8" 3/8"	1 1 2	.08 .14 .18	.28 .37 .54	.58 .69 .72	.71 .80 .74	.68 .76 .71	.65 .73 .72	.55 .65 .70	12"x12" 12"x12" 12"x12"	W W W	.71 .71 .71	.75 1.17 1.17	Perforated, painted See Note 4 See Note 5 See Note 5	47-47 46-124 46-123
AIRACOUSTIC	1/2" 1"	6 6	.13 .29	.41 .51	.40 .70	.72 .82	.78 .79	.72 .80	.60 .70	24"x36" 24"x36"	— —	— —	.80 1.50	Unpainted Unpainted	46-70 46-71

NOTE 1. Sanacoustic is a perforated, enameled metal pan backed with mineral wool sound-absorbing pad. Perforations are .068" in diameter, 4608 holes per sq. ft.

NOTE 2. Holes are 3/16" in diameter, 600 per sq. ft.

NOTE 3. Holes are 5/32" in diameter, 576 per sq. ft.

NOTE 4. Holes are 3/16" in diameter, 3/8" deep, 484 per sq. ft.

NOTE 5. Holes are 3/16" in diameter, 1/8" deep, 484 per sq. ft.

NATIONAL GYPSUM COMPANY

MATERIAL	Thick- ness (See Page 4)	Mount- ing (See Page 5)	COEFFICIENTS							Noise Red. Coef. (See Page 4)	Unit Size Tested	Light Reflection		Wt. Lbs. per Sq. Ft.	SURFACE	Test No.
			128	256	512	1024	2048	4096	Color			Value				
ACOUSTIFIBRE	5/8"	1	.10	.16	.62	.97	.81	.73	.65	12"x12"			.56	Perforated, painted See Note 1	46-137	
		2	.13	.38	.72	.89	.82	.66	.70	12"x12"					46-136	
ECONACOUSTIC	1/2"	1	.05	.17	.62	.83	.77	.74	.60	12"x12"			.40	Painted	46-135	
	1/2"	2	.09	.32	.75	.78	.74	.78	.65	12"x12"			.40	Painted	46-134	
	1"	1	.13	.43	.78	.81	.75	.81	.70	12"x12"			.62	Painted	A47-49	
ACOUSTIMETAL																
Type P pad Plus spacer and metal facing Plus furring	1 1/4" 1 5/8" 2 1/2"	3	.26	.47	.97	.99	.88	.88	.85	12"x24"	W	.72	Pad .91	Perforated,enameled metal. See Note 2	46-06	

NOTE 1. Acoustifibre is perforated with holes $\frac{3}{16}$ " in diameter, $\frac{5}{16}$ " deep, 441 per sq. ft.

NOTE 2. Acoustimetal is a perforated, enameled metal pan backed with sound absorbing mineral wool pad. Perforations are .093" in diameter, 2016 per sq. ft.

OWENS-CORNING FIBERGLAS CORPORATION

MATERIAL	Thick- ness (See Page 4)	Mount- ing (See Page 5)	COEFFICIENTS							Noise Red. Coef. (See Page 4)	Unit Size Tested	Light Reflection		Wt. Lbs. per Sq. Ft.	SURFACE	Test No.
			128	256	512	1024	2048	4096	Color			Value				
FIBERGLAS ACOUSTICAL TILE																
Type A	¾"	1	.12	.32	.75	.83	.70	.63	.65	12"x12"	W	—	.67	Factory painted felted mineral with fiber surface	A48-2	
Type A	¾"	2	.08	.44	.79	.83	.74	.65	.70	12"x12"	W	—	.67		A48-1	
Type A	¾"	9	.47	.65	.75	.84	.83	.81	.75	24"x24"	W	—	—		A48-7	
Type A	1"	1	.11	.31	.79	.94	.84	.79	.70	12"x12"	W	—	.94		A48-4	
Type A	1"	2	.17	.40	.83	.96	.85	.83	.75	12"x12"	W	—	.94		A48-3	
Type A	1"	9	.51	.52	.75	.87	.89	.91	.75	24"x24"	W	—	.90		A48-5	

MEMORANDA

COPIES OF GENERAL BUILDING

1. Copies of the following reports are being furnished to the Bureau of the Census for their information and use in the preparation of the annual report on the building industry.

1914	1915	1916
1917	1918	1919
1920	1921	1922
1923	1924	1925
1926	1927	1928
1929	1930	1931
1932	1933	1934
1935	1936	1937
1938	1939	1940
1941	1942	1943
1944	1945	1946
1947	1948	1949
1950	1951	1952
1953	1954	1955
1956	1957	1958
1959	1960	1961
1962	1963	1964
1965	1966	1967
1968	1969	1970
1971	1972	1973
1974	1975	1976
1977	1978	1979
1980	1981	1982
1983	1984	1985
1986	1987	1988
1989	1990	1991
1992	1993	1994
1995	1996	1997
1998	1999	2000
2001	2002	2003
2004	2005	2006
2007	2008	2009
2010	2011	2012
2013	2014	2015
2016	2017	2018
2019	2020	2021
2022	2023	2024
2025	2026	2027
2028	2029	2030
2031	2032	2033
2034	2035	2036
2037	2038	2039
2040	2041	2042
2043	2044	2045
2046	2047	2048
2049	2050	2051
2052	2053	2054
2055	2056	2057
2058	2059	2060
2061	2062	2063
2064	2065	2066
2067	2068	2069
2070	2071	2072
2073	2074	2075
2076	2077	2078
2079	2080	2081
2082	2083	2084
2085	2086	2087
2088	2089	2090
2091	2092	2093
2094	2095	2096
2097	2098	2099
2100	2101	2102
2103	2104	2105
2106	2107	2108
2109	2110	2111
2112	2113	2114
2115	2116	2117
2118	2119	2120
2121	2122	2123
2124	2125	2126
2127	2128	2129
2130	2131	2132
2133	2134	2135
2136	2137	2138
2139	2140	2141
2142	2143	2144
2145	2146	2147
2148	2149	2150
2151	2152	2153
2154	2155	2156
2157	2158	2159
2160	2161	2162
2163	2164	2165
2166	2167	2168
2169	2170	2171
2172	2173	2174
2175	2176	2177
2178	2179	2180
2181	2182	2183
2184	2185	2186
2187	2188	2189
2190	2191	2192
2193	2194	2195
2196	2197	2198
2199	2200	2201
2202	2203	2204
2205	2206	2207
2208	2209	2210
2211	2212	2213
2214	2215	2216
2217	2218	2219
2220	2221	2222
2223	2224	2225
2226	2227	2228
2229	2230	2231
2232	2233	2234
2235	2236	2237
2238	2239	2240
2241	2242	2243
2244	2245	2246
2247	2248	2249
2250	2251	2252
2253	2254	2255
2256	2257	2258
2259	2260	2261
2262	2263	2264
2265	2266	2267
2268	2269	2270
2271	2272	2273
2274	2275	2276
2277	2278	2279
2280	2281	2282
2283	2284	2285
2286	2287	2288
2289	2290	2291
2292	2293	2294
2295	2296	2297
2298	2299	2300
2301	2302	2303
2304	2305	2306
2307	2308	2309
2310	2311	2312
2313	2314	2315
2316	2317	2318
2319	2320	2321
2322	2323	2324
2325	2326	2327
2328	2329	2330
2331	2332	2333
2334	2335	2336
2337	2338	2339
2340	2341	2342
2343	2344	2345
2346	2347	2348
2349	2350	2351
2352	2353	2354
2355	2356	2357
2358	2359	2360
2361	2362	2363
2364	2365	2366
2367	2368	2369
2370	2371	2372
2373	2374	2375
2376	2377	2378
2379	2380	2381
2382	2383	2384
2385	2386	2387
2388	2389	2390
2391	2392	2393
2394	2395	2396
2397	2398	2399
2400	2401	2402
2403	2404	2405
2406	2407	2408
2409	2410	2411
2412	2413	2414
2415	2416	2417
2418	2419	2420
2421	2422	2423
2424	2425	2426
2427	2428	2429
2430	2431	2432
2433	2434	2435
2436	2437	2438
2439	2440	2441
2442	2443	2444
2445	2446	2447
2448	2449	2450
2451	2452	2453
2454	2455	2456
2457	2458	2459
2460	2461	2462
2463	2464	2465
2466	2467	2468
2469	2470	2471
2472	2473	2474
2475	2476	2477
2478	2479	2480
2481	2482	2483
2484	2485	2486
2487	2488	2489
2490	2491	2492
2493	2494	2495
2496	2497	2498
2499	2500	2501
2502	2503	2504
2505	2506	2507
2508	2509	2510
2511	2512	2513
2514	2515	2516
2517	2518	2519
2520	2521	2522
2523	2524	2525
2526	2527	2528
2529	2530	2531
2532	2533	2534
2535	2536	2537
2538	2539	2540
2541	2542	2543
2544	2545	2546
2547	2548	2549
2550	2551	2552
2553	2554	2555
2556	2557	2558
2559	2560	2561
2562	2563	2564
2565	2566	2567
2568	2569	2570
2571	2572	2573
2574	2575	2576
2577	2578	2579
2580	2581	2582
2583	2584	2585
2586	2587	2588
2589	2590	2591
2592	2593	2594
2595	2596	2597
2598	2599	2600
2601	2602	2603
2604	2605	2606
2607	2608	2609
2610	2611	2612
2613	2614	2615
2616	2617	2618
2619	2620	2621
2622	2623	2624
2625	2626	2627
2628	2629	2630
2631	2632	2633
2634	2635	2636
2637	2638	2639
2640	2641	2642
2643	2644	2645
2646	2647	2648
2649	2650	2651
2652	2653	2654
2655	2656	2657
2658	2659	2660
2661	2662	2663
2664	2665	2666
2667	2668	2669
2670	2671	2672
2673	2674	2675
2676	2677	2678
2679	2680	2681
2682	2683	2684
2685	2686	2687
2688	2689	2690
2691	2692	2693
2694	2695	2696
2697	2698	2699
2700	2701	2702
2703	2704	2705
2706	2707	2708
2709	2710	2711
2712	2713	2714
2715	2716	2717
2718	2719	2720
2721	2722	2723
2724	2725	2726
2727	2728	2729
2730	2731	2732
2733	2734	2735
2736	2737	2738
2739	2740	2741
2742	2743	2744
2745	2746	2747
2748	2749	2750
2751	2752	2753
2754	2755	2756
2757	2758	2759
2760	2761	2762
2763	2764	2765
2766	2767	2768
2769	2770	2771
2772	2773	2774
2775	2776	2777
2778	2779	2780
2781	2782	2783
2784	2785	2786
2787	2788	2789
2790	2791	2792
2793	2794	2795
2796	2797	2798
2799	2800	2801
2802	2803	2804
2805	2806	2807
2808	2809	2810
2811	2812	2813
2814	2815	2816
2817	2818	2819
2820	2821	2822
2823	2824	2825
2826	2827	2828
2829	2830	2831
2832	2833	2834
2835	2836	2837
2838	2839	2840
2841	2842	2843
2844	2845	2846
2847	2848	2849
2850	2851	2852
2853	2854	2855
2856	2857	2858
2859	2860	2861
2862	2863	2864
2865	2866	2867
2868	2869	2870
2871	2872	2873
2874	2875	2876
2877	2878	2879
2880	2881	2882
2883	2884	2885
2886	2887	2888
2889	2890	2891
2892	2893	2894
2895	2896	2897
2898	2899	2900
2901	2902	2903
2904	2905	2906
2907	2908	2909
2910	2911	2912
2913	2914	2915
2916	2917	2918
2919	2920	2921
2922	2923	2924
2925	2926	2927
2928	2929	2930
2931	2932	2933
2934	2935	2936
2937	2938	2939
2940	2941	2942
2943	2944	2945
2946	2947	2948
2949	2950	2951
2952	2953	2954
2955	2956	2957
2958	2959	2960
2961	2962	2963
2964	2965	2966
2967	2968	2969
2970	2971	2972
2973	2974	2975
2976	2977	2978
2979	2980	2981
2982	2983	2984
2985	2986	2987
2988	2989	2990
2991	2992	2993
2994	2995	2996
2997	2998	2999
3000	3001	3002
3003	3004	3005
3006	3007	3008
3009	3010	3011
3012	3013	3014
3015	3016	3017
3018	3019	3020
3021	3022	3023
3024	3025	3026
3027	3028	3029
3030	3031	3032
3033	3034	3035
3036	3037	3038
3039	3040	3041
3042	3043	3044
3045	3046	3047
3048	3049	3050
3051	3052	3053
3054	3055	3056
3057	3058	3059
3060	3061	3062
3063	3064	3065
3066	3067	3068
3069	3070	3071
3072	3073	3074
3075	3076	3077
3078	3079	3080
3081	3082	3083
3084	3085	3086
3087	3088	3089
3090	3091	3092
3093	3094	3095

